


# Salamander Fuel and Oil Suction and Delivery Floating Hose

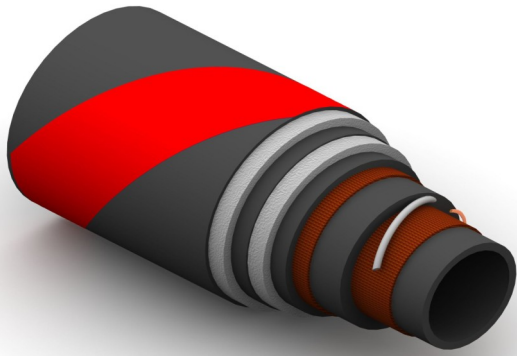

## Construction:

**Tube:** Black NBR .

**Reinforcement:** High Tensile Textile Cords with Embedded Steel Helix Wire and Antistatic Wire.

**Intermediate Cover:** Black CR/BR Blend.

**Flotation Element:** 2 Layers of PE Foam.

**Cover:** Black CR/BR Blend, Abrasion, Ozone and Hydrocarbon Resistant

**Temperature Range:** -30°C To +100°C.

**Typical Application:** Fuel Oil Delivery, with up to 50% Aromatic Content, suitable for Seawater, Mud and general offshore applications, long lasting in bunkering applications.

Minimum Reserve Buoyancy of 25% Using GMPHOM Standard Calculations For All hose.

Note: Finished Hose Dimensions May Be Subject To Change Depending On Specific Gravity of Medium Transported.

## Branding:

**Continental ContiTech OIL S&D - 20 Bar WP**

Black text on a Red stripe

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
DO20HFL-032	51	2	129	20	300	80	1200	350	6.50
DO20HFL-048	76	3	146	20	300	80	1200	450	7.60
DO20HFL-064	102	4	178	20	300	80	1200	550	10.80
DO20HFL-080	127	5	206	20	300	80	1200	700	13.60

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)