


PW20S Potable Water Delivery Hose

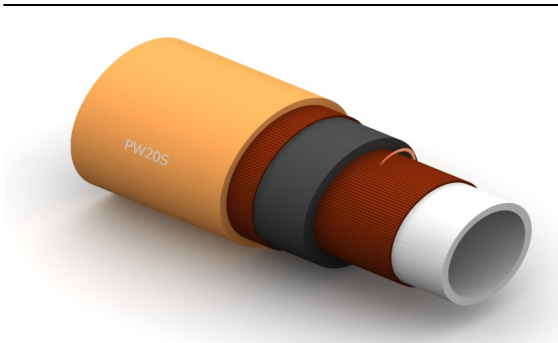

Construction:

Tube: White NR.

Reinforcement: High Tensile Textile Cords, Plus Antistatic Wire.

Cover: Orange CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -35°C To +100°C.

Typical Application: Potable Water Transfer

Branding:

Continental ContiTech **PW20S POTABLE WATER DELIVERY WP 20 BAR**

White text

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
PW20S-008	13	½	23	20	300	80	1200	78	0.38
PW20S-012	19	¾	31	20	300	80	1200	115	0.62
PW20S-016	25	1	37	20	300	80	1200	150	0.77
PW20S-024	38	1½	50	20	300	80	1200	228	1.11
PW20S-032	51	2	68	20	300	80	1200	306	1.90
PW20S-048	76	3	97	20	300	80	1200	608	3.03
PW20S-064	102	4	124	20	300	80	1200	816	4.45
PW20S-080	127	5	148	20	300	80	1200	1010	5.95

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en