


# FIRESHIELD 5000 Hydraulic Hose

## Blowout Preventor Control Hose

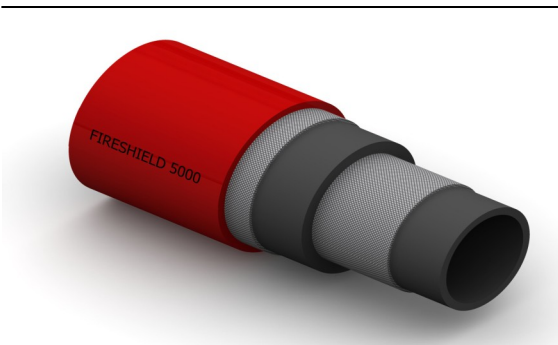

### Construction:

**Tube:** Black CR Rubber.

**Reinforcement:** 1/4" & 3/8", Two Wire Braid, Others 4 or 6 Wire Spirals.

**Cover:** Red Flame Retardent CR Rubber Over Layers Of Heat Resistant Fibre.

**Temperature Range:** -40°C To +100°C.

### Fire Rating:

Lloyds Approved (OD/1000/499) At 700°C For 5 Minutes and API16D Compliant.

### Branding:

**Continental ContiTech FIRESHIELD 5000**

Black text

### Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
FS50-04	6	1/4	20.0	345	5000	1379	20000	110	0.75
FS50-06	10	3/8	24.0	345	5000	1379	20000	150	0.80
FS50-08	13	1/2	30.0	345	5000	1379	20000	250	1.22
FS50-12	19	3/4	37.0	345	5000	1379	20000	330	1.82
FS50-16	25	1	44.0	345	5000	1379	20000	375	2.53
FS50-20	32	1.1/4	58.0	345	5000	1379	20000	460	4.20
FS50-24	38	1.1/2	63.0	345	5000	1379	20000	520	6.29
FS50-32	51	2	77.0	345	5000	1379	20000	700	8.90

Dunlop Oil & Marine Ltd  
 Jubilee Industrial Estate  
 Ashington, Northumberland  
 NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)



The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
 For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)