


# AT20S Compressed Air Hose

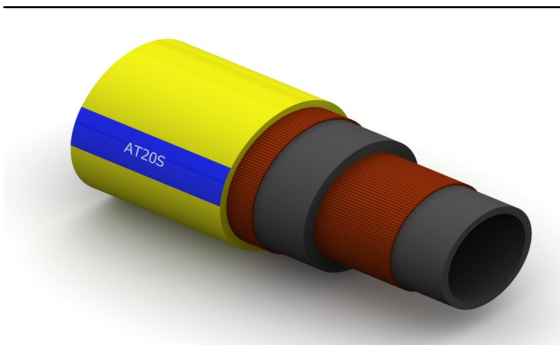

## Construction:

**Tube:** Black NBR; Oil Mist Resistant.

**Reinforcement:** High Tensile Textile Cords.

**Cover:** Yellow NBR; Abrasion and Ozone Resistant.

**Temperature Range:** -35°C To +85°C.

**Typical Application:** Compressed Air, Designed for Heavy Duty Applications.

## Branding:

**Continental ContiTech AT20S AIR WP 20 BAR**

White text on a Blue stripe

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
AT20S-006	10	3/8	19	20	300	60	900	60	0.23
AT20S-008	13	1/2	23	20	300	60	900	78	0.39
AT20S-012	19	3/4	30	20	300	60	900	114	0.60
AT20S-016	25	1	37	20	300	60	900	150	0.79
AT20S-024	38	1.1/2	52	20	300	60	900	228	1.36
AT20S-032	51	2	67	20	300	60	900	306	2.00

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)