


AW30/40S Compressed Air Hose

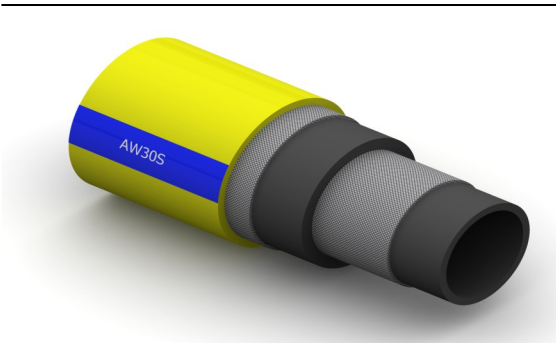

Construction:

Tube: Black NBR; Oil Mist Resistant.

Reinforcement: High Tensile Steel Cords.

Cover: Yellow SBR; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Compressed Air, designed for long lasting service and maximum safety in heavy duty applications.

Branding:

Continental ContiTech AW30S AIR WP 30 BAR

White text on a Blue stripe

Continental ContiTech AW40S AIR WP 40 BAR

White text on a Blue stripe

Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
AW40S-024	38	1½	52	40	600	160	2400	190	1.65
AW40S-032	51	2	65	40	600	160	2400	255	2.19
AW30S-048	76	3	95	30	450	120	1800	380	4.20
AW30S-064	102	4	121	30	450	120	1800	510	5.80

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en