


HW17S Saturated Steam Hose

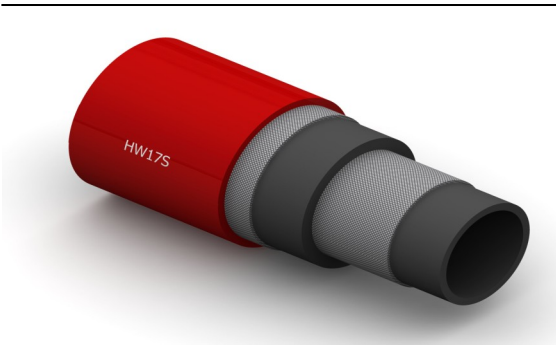

Construction:

Tube: Black EPDM.

Reinforcement: High Tensile Steel Cords.

Cover: Red EPDM; Heat, Abrasion and Ozone Resistant.

Temperature Range: -40°C To +208°C.

Typical Application: Saturated Steam.

Branding:

Continental ContiTech HW17S STEAM WP 17 BAR

White text

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
HW17S-008	13	½	25	17	250	170	2500	130	0.55
HW17S-012	19	¾	33	17	250	170	2500	190	0.83
HW17S-016	25	1	40	17	250	170	2500	250	1.02
HW17S-024	38	1½	54	17	250	170	2500	380	1.78
HW17S-032	51	2	69	17	250	170	2500	510	2.67

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en