


NG20S Nitrogen Hose

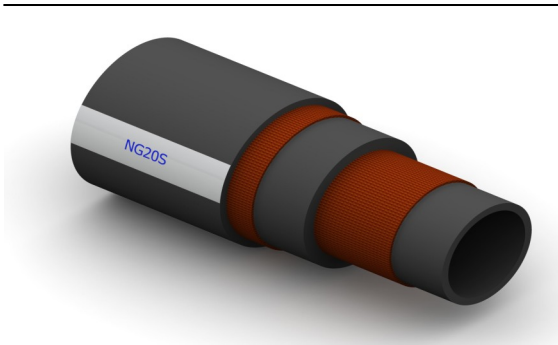

Construction:

Tube: Black EPDM.

Reinforcement: High Tensile Textile Cords.

Cover: Black EPDM; Abrasion and Ozone Resistant.

Temperature Range: -40°C To +100°C.

Typical Application: Nitrogen.

Branding:

Continental ContiTech NG20S NITROGEN DELIVERY WP 20 BAR

Blue text on a Silver stripe

Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
NG20S-006	10	3/8	17	20	300	60	900	60	0.23
NG20S-008	13	1/2	21	20	300	60	900	78	0.29
NG20S-012	19	3/4	28	20	300	60	900	114	0.48
NG20S-016	25	1	35	20	300	60	900	150	0.66
NG20S-024	38	1.1/2	52	20	300	60	900	228	1.33
NG20S-032	51	2	66	20	300	60	900	306	1.89

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en