

Flexible Tauro™Fit Choke & Kill Line

for subsea BOPs


Standard

API Spec. 16C up to FSL 3



Construction

Bore type	full flow, rough bore
Liner material	H ₂ S resistant PA
Shape	Preformed
Operating temperature	-18°C to +121°C (0°F to 250°F)
Survival temperature	177°C (350°F) for at least 1 hour

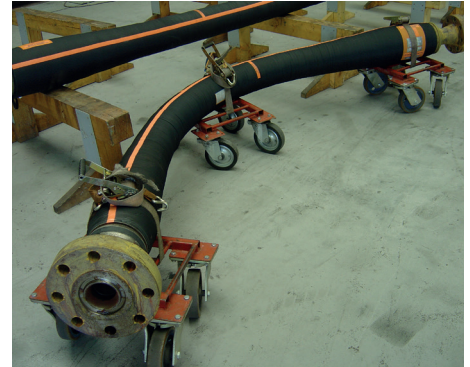

Features & Comments

- Easy installation in confined spaces
- Extended service life as a result of reduced risk of over-bending and reduced stress on hose body and on coupling
- Transfers less load to adjacent equipment or pipework
- New short coupling design increases flexible length with no reduction in bonding strength
- Opens up new design opportunities to reduce the size and weight of oil field equipment
- Coupling materials meet NACE MR 01-75 / ISO 15156 latest edition
- Handling instructions: ContiTech TKO ASO and AS2 latest editions

Technical Data

Inside Diameter		Type	Rated Working Pressure		Test Pressure		Safety Factor (WP)	Outer Diameter		MBR (operation)		Weight	
mm	in		bar	psi	bar	psi		mm	in	m	ft	kg/m	lb/ft
78	3.0	Standard	690	10,000	1,035	15,000	2.25	168	6.6	0.6	2.0	49	33
		Standard c/w st. st. wrap						180	7.1	0.6	2.0	56	38
		Fire rated						182	7.2	0.7	2.3	56	38
		Fire rated c/w st. st. wrap						193	7.6	0.7	2.3	63	42
		Standard	1,035	15,000	1,552	22,500	2.25	208	8.2	1.0	3.3	90	61
		Standard c/w st. st. wrap						213	8.4	1.0	3.3	97	65
		Fire rated						218	8.6	1.1	3.6	97	65
		Fire rated c/w st. st. wrap						224	8.8	1.1	3.6	105	71