

Rotary & Vibrator Hose

swaged coupling

Standard


API 7K Spec. FSL 1 - FSL 2

Construction

Bore type	not full flow, smooth bore
Liner material	NBR or CR
Operating temperature	-30°C to +82°C (-22°F to 180°F)
Max. available length	40m (131ft)

Features & Comments

- Branded Taurus Emergé
- Handling instructions: ContiTech TKO AS0 and AS3 latest edition

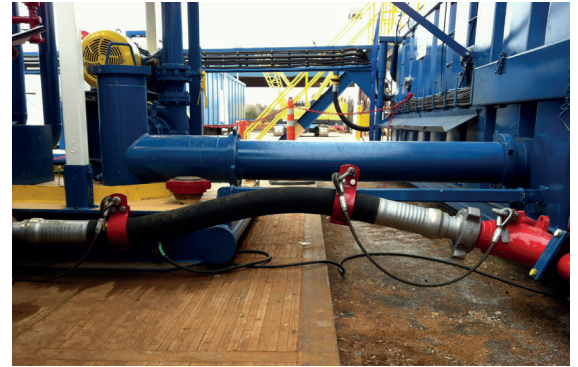

Technical Data

Inside Diameter		Rated Working Pressure		Test Pressure		API Grade	Safety Factor (WP)	Outer Diameter		MBR (operation)		Weight	
mm	in	bar	psi	bar	psi			mm	in	m	ft	kg/m	lb/ft
76	3.0	345	5000	517	7500	D	2.5	126	5	0.8	2.6	18	12
89	3.5	345	5000	517	7500	D	2.5	140	5.5	0.9	3.0	21	14