


DO20S Fuel and Oil Delivery Hose

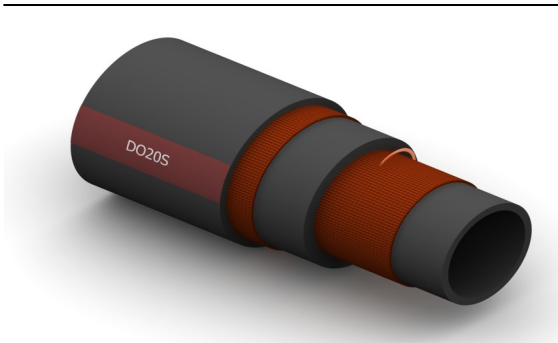

Construction:

Tube: Black NBR .

Reinforcement: High Tensile Textile Cords Plus Antistatic Wire.

Cover: Black Conductive NBR; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -30°C To +100°C.

Typical Application: Fuel Oil Delivery, with up to 50% Aromatic Content, suitable for Seawater, Mud and general offshore applications, long lasting in bunkering applications.

Branding:

Continental ContiTech DO20S OIL DELIVERY WP 20 BAR

White text on a Brown stripe

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
DO20S-006	10	3/8	19	20	300	80	1200	78	0.35
DO20S-008	13	1/2	23	20	300	80	1200	78	0.36
DO20S-012	19	3/4	30	20	300	80	1200	114	0.56
DO20S-016	25	1	37	20	300	80	1200	150	0.74
DO20S-024	38	1.1/2	54	20	300	80	1200	228	1.52
DO20S-032	51	2	68	20	300	80	1200	306	2.18
DO20S-048	76	3	96	20	300	80	1200	456	3.61
DO20S-064	102	4	124	20	300	80	1200	612	5.10
DO20S-080	127	5	151	20	300	80	1200	762	6.67
DO20S-096	152	6	178	20	300	80	1200	912	8.50

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en