


LM40H Liquid Mud Suction and Delivery Hose

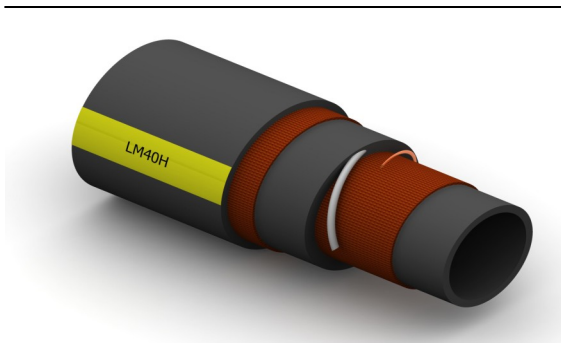

Construction:

Tube: Black NBR.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire And Antistatic Wire.

Cover: Black IR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -30°C To +100°C.

Typical Application: : Liquid Mud containing Crude Oil and Grit suction & delivery in offshore applications. Also suitable for Fuel Oil suction & delivery with up to 50% Aromatic Content.

Branding:

Continental ContiTech LM40H OIL SUCTION & DELIVERY WP 40 BAR

Black text on a Yellow stripe

Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
LM40H-048	76	3	102	40	600	160	2400	456	5.54
LM40H-064	102	4	129	40	600	160	2400	612	7.46
LM40H-080	127	5	169	40	600	160	2400	762	13.80

Dunlop Oil & Marine Ltd
Jubilee Industrial Estate
Ashington, Northumberland
NE63 8UB United Kingdom
www.dunlop-oil-marine.co.uk

Continental 
CONTITECH

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.
For complete information go to:
www.contitech.de/discl_en