


# BM10H Bulk Material Suction and Delivery Hose

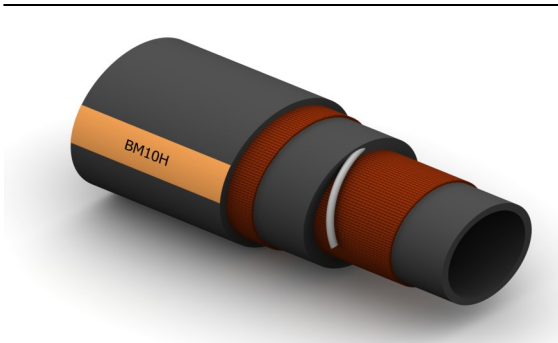

## Construction:

**Tube:** Black SBR/NR Blend, Abrasion Resistant.

**Reinforcement:** High Tensile Textile Cords with Embedded Steel Helix Wire.

**Cover:** Black IR/BR Blend; Abrasion and Ozone Resistant.

**Temperature Range:** -35°C To +85°C.

**Typical Application:** Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

## Branding:

### Barite Service:

**Continental ContiTech BM10H BULK MATERIAL SUCTION & DELIVERY WP 10 BAR**

Black text on an Orange stripe

### Cement Service:

**Continental ContiTech BM10H BULK MATERIAL SUCTION & DELIVERY WP 10 BAR**

Black text on a Yellow stripe

## Technical Data:

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
BM10H-064	102	4	127	10	150	40	600	612	6.60
BM10H-080	127	5	149	10	150	40	600	762	7.10
BM10H-096	152	6	180	10	150	40	600	912	9.60
BM10H-160	254	10	291	10	150	40	600	1524	26.20

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)