


# PW10S Potable Water Delivery Hose

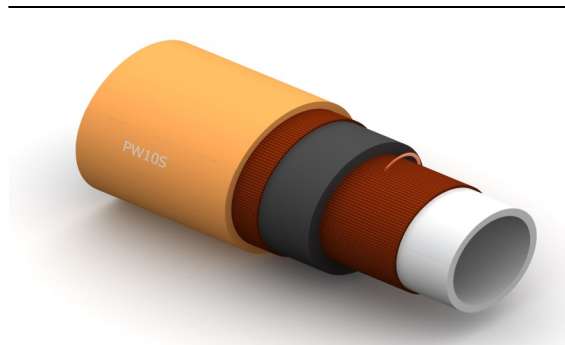

## Construction:

**Tube:** White NR.

**Reinforcement:** High Tensile Textile Cords Plus Antistatic Wire.

**Cover:** Orange CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

**Temperature Range:** -40°C To +100°C.

**Typical Application:** Potable Water Transfer

## Branding:

**Continental** ContiTech PW10S POTABLE WATER DELIVERY WP 10 BAR

White text

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
PW10S-032	51	2	66	10	150	40	600	508	2.07
PW10S-048	76	3	92	10	150	40	600	762	3.12
PW10S-064	102	4	119	10	150	40	600	1016	4.63
PW10S-096	152	6	174	10	150	40	600	1524	8.28

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)